




50mm Spot Welding Machine 50HZ 60KVA Pressure Welding Machine For Basket

Our Product Introduction

for more products please visit us on wire-bendingmachine.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Jin Hongxiang
- Certification: CE
- Model Number: JD-60
- Minimum Order Quantity: 1 set
- Price: Negotiable
- Packaging Details: Export safety wooden case
- Delivery Time: 5-10 working days. Or negotiation
- Supply Ability: 50 Set/Sets per Month

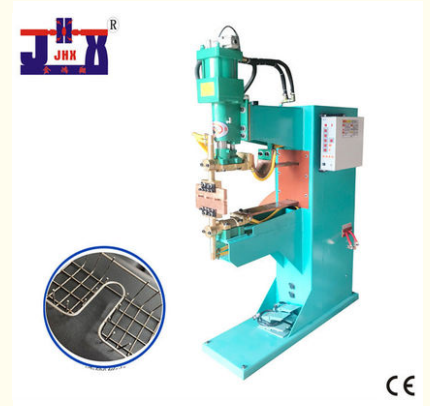

Product Specification

- Product Name: Spot Welder
- Applicable Industries: Building Cover Plate, Railway / Road Guardrail, Pet Cage, Storage Rack, Net Basket
- Rated Capacity: 60KVA
- Rated Duty Cycle: 80%
- Usage: Welding, Multi-point Welding
- Voltage: 380V, 50HZ
- Warranty: 1 Year
- Key Selling Points: Taiwan's Water-cooled Wet Control Transformer Will Not Be Affected By Overload
- Weight (KG): 360 KG
- Control System: Touch Electric Box Control
- Cylinder Stroke: 50MM
- Nominal Frequency: 50/60HZ



More Images



Product Description

Air pressure row welder for basket welding

Product Description

Performance characteristics

1. Cylinder direct pressure mechanism, good follow-up performance, fast welding speed, combined cylinder, Taiwan AS2410 large flow solenoid valve. Taiwan AS2410 solenoid valve has strong suction and sensitive response. It is ideal for continuous row welding of mesh.

**Taiwan AS2410 large
flow solenoid valve**



**Connected large
air cylinder**

2. All red copper water cooling temperature control device of transformer has the advantages of long service life, low noise, safety and convenient use.

A. Taiwan transformer features: sufficient capacity, greater welding force and stronger conductivity.

B. Water circulation cooling, which can be used within the rated range to ensure 24 hours of operation.

C. Moreover, the temperature control device can work overload and automatically cut off power to protect the whole machine from being affected.



3.The water-saving forced cooling mode is adopted, and the main circuit adopts high-power SCR contactless switch, with high conductivity and low power loss , High temperature automatic protection.








Welding product representative

Row welding

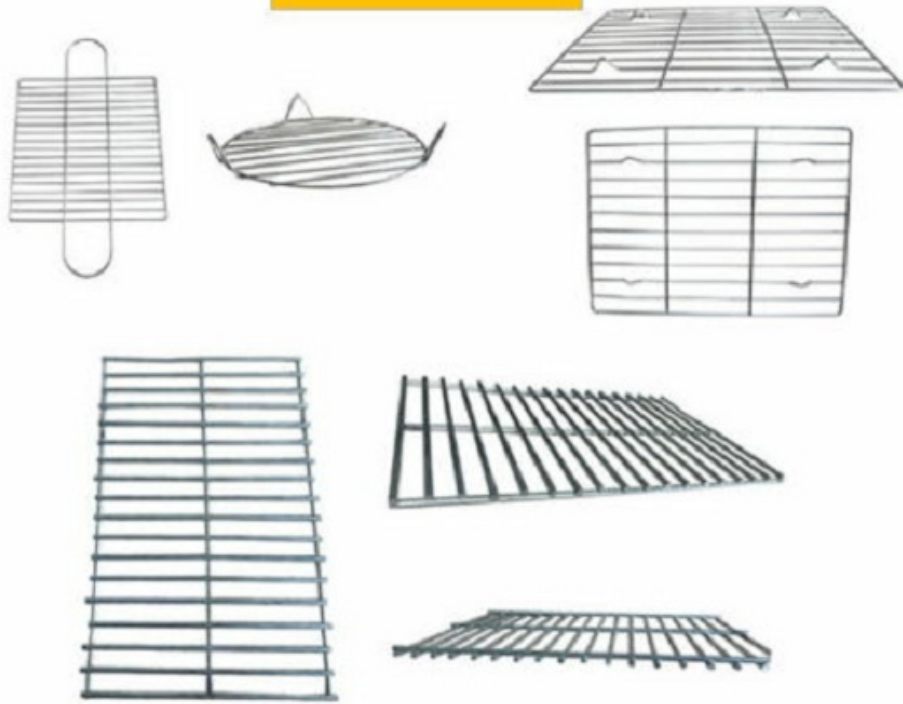

Technical parameters:								
Model	Rated power KVA	Input voltage V	Nominal frequency HZ	Maximum short circuit current A	arm length mm	electrode travel MM	Cooling water volume	Weight KG
JD-60	60	380	50/60	22000	600	50	10	350
JD-80	80	380	50/60	28000	600	50	10	400
JD-100	100	380	50/60	30000	600	50	10	430
JD-120	120	380	50/60	32000	600	50	12	460
JD-150	150	380	50/60	34000	600	50	12	500
JDX-35	35	380	50/60	15000	400	50	/	197
JDX-50	50	380	50/60	20000	400	50	/	248

FAQ

Q: What is your normal lead time?

A. If there is stock, our company usually receives the payment for goods and delivers them within a week. If it needs to be customized, the delivery cycle is usually 3-4 weeks after receiving the deposit.

Q: What are your terms of payment?

A: We accept TT.

Q: What kind of packing do you offer?

A. Packaging is usually installed for the export of plywood boxes.

Q: What is the minimum order quantity you can produce?

A. Usually we have them in stock, and the minimum order is 1 set.

Q: How to control product quality?

A. We always attach great importance to product quality. Before leaving the factory, it will be fully aged and debugged. And we always adhere to the principle of "providing customers with better quality, better price and better service."



Dongguan Jinghongxiang Automation Equipment Co., Ltd.



13925780098



jhx16888@gmail.com



wire-bendingmachine.com

No. 78, Shangzhong Road, Shangdi Industrial Zone, Liaobu Town, Dongguan, Guangdong, China