




Stainless Steel CNC 2D Wire Bending Machine Carbon Steel For S Type Hangers

Our Product Introduction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Jin Hongxiang
- Certification: CE
- Model Number: J2D-2-6
- Minimum Order Quantity: 1 set
- Price: Negotiable
- Packaging Details: Export wooden case
- Delivery Time: 5-10 days or negotiation
- Payment Terms: L/C, T/T
- Supply Ability: 100 Sets per Month

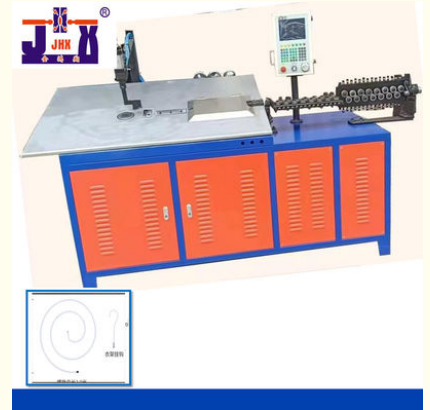

Product Specification

- Function: Bend The Iron Wire Into Various Shapes
- Control System: Servo Motor, Planetary Reducer
- Applicable Industries: Round Line/flat Iron Molding, Curved Flower,
- Wire Size: $\varnothing 2-8\text{mm}$
- Warranty: 1 Year
- Wire Feeding Speed: 70 M/MIN)
- Material: Carbon Steel Wire, Stainless Steel
- Products Produced: Coat Hanger, S-hook
- Highlight: **2D Wire Bending Machine Carbon Steel, Stainless Steel 2D Wire Bending Machine, 2D CNC Wire Bending Machine**



Product Description

Wire bending machine is used for hangers to bend S-type

Product Description

2D forming machine is a plane 2D wire bending forming machine. The forming process of wire shapes with different specifications can be realized through various transformations of molds. There are servo feeding + hydraulic cut-off combination, servo feeding + servo cut-off and full servo combination, which can be selected according to the size of actual products to achieve the highest cost performance. According to the needs of products, chamfering, arc punching, punching and other functions can also be added to achieve wider application and use.

This machine can be used in all walks of life. As long as the wire flat iron forming bending, can be convenient and fast with the machine production.

Technical parameter of 2D molding machine

Model	J2D-2-6	J2D-2-8	J2D-2-10	JS2D-2-6
Number axes	3	3	3	4
Processing line diameter(MM)	Hard wire ø2-4	Hard wire ø2-6	Hard wire ø2-8	Hard wire ø2-4
	Flexible wire ø2-6	Flexible wire ø2-8	Flexible wire ø2-10	Flexible wire ø2-6
Number of delivery wheels (Group)	3	3	3	3
Control system	32-bit high-performance processor, can store 2048 files, programming accuracy 0.01	32-bit high-performance processor, can store 2048 files, programming accuracy 0.01	32-bit high-performance processor, can store 2048 files, programming accuracy 0.01	32-bit high-performance processor, can store 2048 files, programming accuracy 0.01
Maximum wire speed(M/MIN)	80	70	60	90
Movement direction	rotating die can be raised and lowered, and the positive and negative motion can be realized	rotating die can be raised and lowered, and the positive and negative motion can be realized	rotating die can be raised and lowered, and the positive and negative motion can be realized	rotating die can be raised and lowered, and the positive and negative motion can be realized
Wire delivery accuracy(mm)	±0.1	±0.1	±0.1	±0.1
Solenoid valve and quantity	nothing	nothing	nothing	3
Input power	380V,50/60HZ	380V,50/60HZ	380V,50/60HZ	380V,50/60HZ

Applicable to various industries

- 1.Wire craft products, lighting molding products, fishing gear parts products, wine racks, family fruit plates, garden flower racks, Christmas wire gifts, etc.
- 2.Processing of all kinds of cages: bird cage, dog cage, pet cage, breeding cage, rat cage, etc. Clothes hanger, shoe hanger, curtain hook, shelf hook, display hook and other hooks .

Guest product display

Iron hook



"S" shape



Dongguan Jinghongxiang Automation Equipment Co., Ltd.



13925780098



jhx16888@gmail.com



wire-bendingmachine.com

No. 78, Shangzhong Road, Shangdi Industrial Zone, Liaobu Town, Dongguan, Guangdong, China

