



## Flat Iron Automatic Ring Making Machine Servo Motor Auto Punching Machine

### Our Product Introduction

for more products please visit us on [wire-bendingmachine.com](http://wire-bendingmachine.com)

#### Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Jin Hongxiang
- Certification: CE
- Model Number: JQ2-10MM
- Minimum Order Quantity: 1 set
- Price: Negotiable
- Packaging Details: Export wooden case
- Delivery Time: 5-10 days or negotiatio
- Supply Ability: 100 Sets per Month



#### Product Specification

- Function: Flat Iron Ring Punching
- Control System: PLC Display Screen, Servo Motor
- Applicable Industries: Lampshade, Fan Net Cover, Commodity Shelf, Flower Rack,
- Wire Size:  $\varnothing 2-10\text{mm}$
- Warranty: 1 Year
- Advantage: High Efficient Simple Operation
- Port: Shenzhen ,China
- Control: Numerical Control
- Voltage: 380V/50HZ
- Highlight: Flat Iron Automatic Ring Making Machine,  
Servo Motor Automatic Ring Making Machine,  
Servo Motor Auto Punching Machine

## Product Description

### Full automatic flat iron circle mechanism with double functions of circle + punching

This type of looping machine is customized, and it needs to lift the standard drawing or physical object of the product. Customized as required.

Servo feeding is fast and accurate, hydraulic cutting, cutting iron wire more forcefully

#### Performance characteristics

1. Servo feeding - fast and accurate, speed adjustable. Oil pressure cut-off - large force, easy and powerful line cutting.



2. PLC programming + man-machine interface display, easy to operate and learn. High end servo + planetary reducer.




3. Precision CNC turning and milling. Gear, shaft, wire feeding wheel and other finishing, special hardening, surface grinding and polishing, high hardness, smooth and wear-resistant.

**齿轮坚硬，有韧性，光滑，精加工**  
**gear is hard, tough, smooth and finish machined**



**送线轮 光洁，耐磨，多线槽，精加工**  
**wire feeding wheel is smooth, wear-resistant,**  
**multi trunking and finish machining**

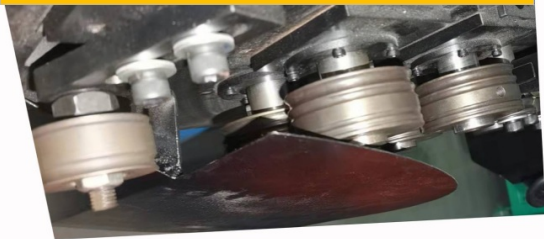

Technical parameters of servo circle machine

Model	JQ2-6MM	JQ2-8MM	JQ2-10MM
Wire diameter range (MM)	Hard wire2-4 lexible cord2-6	Hard wire2-6 Flexible cord2-8	Hard wire2-8 Flexible cord2-10
Servo device	1KW+5B	1.5KW+5B	2.3KW+10B
Hydraulic device	1.5KW	2.2KW	2.2KW
Maximum wire feeding speed(M/MIN)	70	60	50
Circle diameter range (MM)	50-800	50-800	50-800
Circle diameter Tolerance MM	±0.3	±0.3	±0.3
Axis	2	2	4
Dimension(CM)	145*75*142	145*75*142	175*75*142

Multi function looping machine, widely used, can be used as long as it is a flat iron circle or a flat iron circular arc  
 Convenient setting, automatic counting, punching cylinder can be one cylinder or two cylinders according to needs



Production workshop display



**Dongguan Jinghongxiang Automation Equipment Co., Ltd.**



13925780098



jhx16888@gmail.com



wire-bendingmachine.com

No. 78, Shangzhong Road, Shangdi Industrial Zone, Liaobu Town, Dongguan, Guangdong, China