

# 5MM - 9MM Automatic Blanking Machine Linear Straightening Wire Machine

#### **Basic Information**

Place of Origin: Guangdong, ChinaBrand Name: Jin Hongxiang

Certification: CE
Model Number: JZ5-9
Minimum Order Quantity: 1 set
Price: Negotiable

Packaging Details: Wooden case packaging for export

Delivery Time: 5-10 days or negotiationSupply Ability: 50 Set/Sets per Month



#### **Product Specification**

Product Name: Straightening And Cutting Machine
 Core Components: Motor, Cast Iron, Machined Parts

• Power: 3+4KW

• Warranty: 1 Year, 1 Years

 Key Selling Points: Fully Automatic, Low Price, Small Straightening Length Error,

Ottalgritering Length Error,

• Applicable Industries: Widely Used In Hardware, Machinery,

Electrical, Instrumentation, Construction And

Other Industries.

• Weight (KG): 460

Control System: Fully Automatic, Low Price, Small

Straightening Length Error,

• Highlight: 9MM Automatic Blanking Machine,

CE Automatic Blanking Machine, Linear Straightening Wire Machine



#### **Product Description**

#### Wire blanking machine Straightening machine 5-9MM


This machine is widely used in iron wire craft factory, for straightening and cutting iron wire under the iron wire.

#### Other names

Straightening and cutting machine, straightening machine, linear machine, cutting machine, straightening machine, straightening machine, 1-2.5MM straightening machine, 2-5MM straightening machine, 5-9MM straightening machine, small straightening machine, medium straightening machine, large straightening machine,





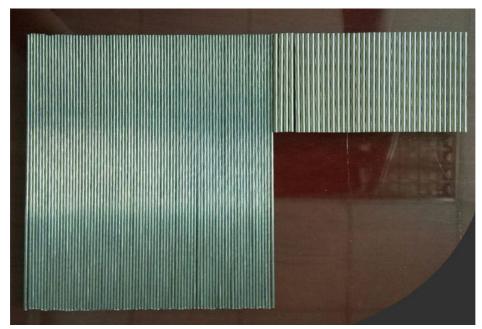

#### Performance Characteristics

- 1. It is suitable for straightening and cutting carbon steel wire, stainless steel wire, iron wire, non-ferrous metal wire with
- high hardness, etc.
- 2. Reasonable structure, beautiful appearance and low noise.
- 3. Mechanical accessories are well made, exquisitely assembled and have long service life.
- ${\it 4. It is divided into various models, large, medium and small, and the input voltage is 380V.}\\$

- $5. \ Automatic \ straightening \ and \ cutting, \ wire \ feeding \ speed \ 16-28m\ / \ min, \ length \ error \ plus \ or \ minus \ 0.2mm.$
- 6. Cutting length range: 50-2000mm. All copper motor.
- $7. \ Main \ configuration: 1 \ main \ machine, 2m \ fixed \ length \ rod \ and \ 1 \ feeding \ line \ frame.$
- 8. Vulnerable accessories: 2 cutters, 2 wire holes and 2 sets of straightening blocks (nodular cast iron).

#### Detail display

1. CNC precision turning and milling are standardized from each large head, large rotating shaft, slider to small cap.

Good coordination of the whole machine to ensure stable operation of the machine.










2. All kinds of shaft cores are CNC lathes, which are hardened by special process and have smooth surface. Durable and good transmission. Uniform size standard, better matching performance of the whole machine

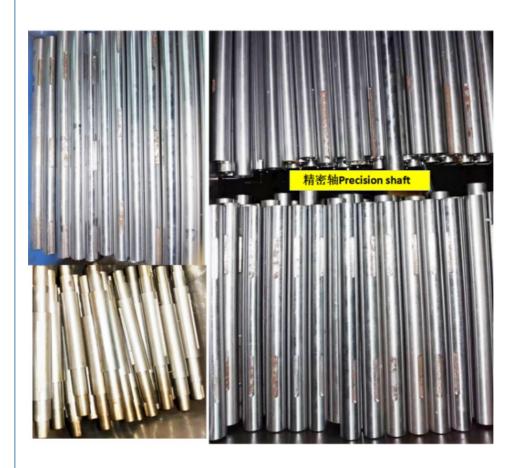

3. Cutters, wire holes and straightening blocks are wearing parts. It needs to be replaced at any time.

The cutter is welded with tungsten particles and is durable. Wire hole, hardened by special process,

durable. Straightening blocks can be selected according to different materials and surface requirements.

There are bakelite, tungsten steel and ductile iron.

#### Cutters,



wire holes



### straightening blocks



4. The reverse switch can make the straightening operate forward and backward, and avoid the cost of material transfer when debugging the machine..



6.It is equipped with an oil injector. The lubricating oil is loaded into this container at one time.

With a slight press from time to time, the lubricating oil can be automatically transported to various places where it is needed, saving time and labor.



7. The copper sleeve inside the head is wear-resistant copper, which is durable and has good mobility.



8. Equipped with conventional feeding rack, with load less than 250kg.

## 装线架Wire rack



| Technical parameter           |             |            |            |            |            |
|-------------------------------|-------------|------------|------------|------------|------------|
| Model                         | JZ1-2.5     | JZ2-5      | JZ5-9      | JZ9-12     | JZ12-16    |
| Max.diameter                  | φ2.5mm      | φ5mm       | φ9mm       | φ12mm      | φ16mm      |
| Max.length                    | 1000mm      | 2000mm     | 2000mm     | 2000mm     | 2000mm     |
| Straighten deliver link speed | 16-25m/min  | 16-25m/min | 16-25m/min | 15-18m/min | 15-18m/min |
| Power                         | 0.55+0.55kw | 0.55+1.5kw | 1.5+5.5kw  | 3+7.5kw    | 3+10kw     |
| Weight                        | 140kg       | 250kg      | 450kg      | 600kg      | 800kg      |

Workshop display





no matter new or old models, we must achieve the ultimate!!

#### Warm tip:

our products are constantly upgraded and improved.

If the color or structure changes, the real object shall prevail.



Dongguan Jinghongxiang Automation Equipment Co., Ltd.



13925780098



jhx16888@gmail.com



e wire-bendingmachine.com