

# Shelf Mesh Corner Cutting Machine PLC Control Angle Cutting Machine

#### **Basic Information**

Place of Origin: Guangdong, ChinaBrand Name: Jin Hongxiang

• Certification: CE

• Model Number: JWPQJ1848

Minimum Order Quantity: 1 setPrice: Negotiable

Packaging Details: Export wooden case
 Delivery Time: 5-10 days or negotiation
 Supply Ability: 20 Sets per Month



#### **Product Specification**

• Warranty Of Core 1 Year Components:

• Product Name: Mesh Angle Cutting Machine, Used For 4

Corners Of Mesh

• Function: Cut Four Corners Of The Mesh


Control System: PLC

Applicable Industries: Special Machine For Grid Rack

• Warranty: 1 Year

• Highlight: Shelf Mesh Corner Cutting Machine,

PLC Control Corner Cutting Machine, PLC Control Angle Cutting Machine



#### **Product Description**

#### **Corner Cutting Machine Special Equipment For Shelf Mesh**

#### Name:

JWPQJ 1848 corner cutting machine, mesh corner cutting machine, shelf mesh corner cutting machine, shelf special machine, 4818 mesh special machine

#### **Function**

It is used to cut the corners of the four corners of the mesh of the shelf, cut the required space at one time, and it is convenient to weld the column sleeve of the shelf. The product corner cutting is neat and standardized, which is more convenient for robot automatic welding in the later stage.


#### Performance characteristics

- 1. Input voltage 380V, 50Hz, Hydraulic motor power 7.5kw + special high-pressure pump. Large force and fast oil pump make multiple oil cylinders work harmoniously and react quickly.
- 2. There are 11 heavy-duty oil cylinders 4 + 4 + 3 in total. The oil circuits are precisely arranged, coordinated and fast. There are 8 cut-off cylinders. One cylinder cuts 2 lines and four corners. 8 lines can be cut at a time, which is fast. Cutting a mesh takes only 1-2 seconds.
- 3. PLC programming + man-machine interface display, simple setting, convenient adjustment and change.
- 4. Specification of cutting mesh: 1848 inches. Range can be adjusted before and after.
- 5. For the incision, the standard state is that the incision is perpendicular to the mesh, and other angles can be made as needed.






#### Detail display

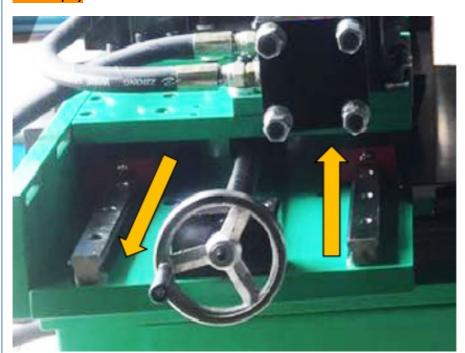


1. In the front and rear direction, the large load-bearing slide rail + screw rod, and the worktable can move back and forth to facilitate the corner cutting of mesh with different widths.

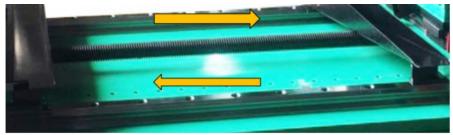

2. Left and right direction, large load-bearing slide rail + screw rod, the worktable can be moved left and right, which is convenient for mesh corner cutting of different lengths

#### Product display

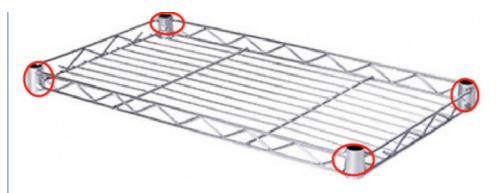

### Technical parameter

| te      | technical parameter |          |                    |                      |                      |                      |        |
|---------|---------------------|----------|--------------------|----------------------|----------------------|----------------------|--------|
| M       | lodel               | •        | Hydraulic<br>motor | Maximum<br>mesh size | Minimum<br>mesh size | Overall<br>dimension | Weight |
| JV<br>8 | VPQJ184             | 380V50HZ | 7.5KW              | 118*48 inches        | 13.5*13.5inch<br>es  | 2.5M*1.5M*1.<br>2M   | 1100KG |

Pack and export to Vietnam



#### Our purpose:

every equipment should be the best!!

Warm tip:
our products are constantly upgraded and improved.
If the color or structure changes, the real object shall prevail.

## Dongguan Jinghongxiang Automation Equipment Co., Ltd.



