

70m/Min Plane Sheet Bending Machine Automatic For Lighting Lampshades

Our Product Introduction


Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Jin Hongxiang
- Certification: CE
- Model Number: J2D-2-6
- Minimum Order Quantity: 1 set
- Price: Negotiable
- Packaging Details: Export wooden case
- Delivery Time: 5-10 days or negotiation
- Payment Terms: L/C, T/T
- Supply Ability: 100 Sets per Month



Product Specification

- Function: Bend The Iron Wire Into Various Shapes
- Control System: Servo Motor, Planetary Reducer
- Applicable Industries: Wire Processing And Forming
- Wire Size: $\varnothing 2-6\text{mm}$
- Warranty: 1 Year
- Wire Feeding Speed: 70 M/MIN)
- Highlight: **Plane Sheet Bending Machine Lighting Lampshade**
, 70m/Min Plane Sheet Bending Machine

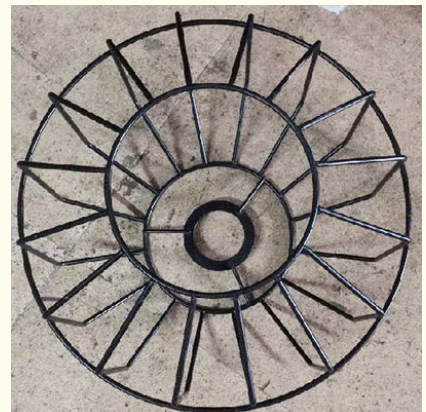

Product Description

Automatic plane bending machine for lighting lampshades

Alias name

2D molding machine, 2D wire bending machine, 2D frame bending machine, plane bending machine, bending machine, frame folding machine, basket bending machine, wire bending machine

Product Description

2D forming machine is a plane 2D wire bending forming machine. The forming process of wire shapes with different specifications can be realized through various transformations of molds. There are servo feeding + hydraulic cut-off combination, servo feeding + servo cut-off and full servo combination, which can be selected according to the size of actual products to achieve the highest cost performance. According to the needs of products, chamfering, arc punching, punching and other functions can also be added to achieve wider application and use.

The equipment can be programmed to control the setting of part accuracy requirements, so as to meet the different forming requirements of different wires and different shapes.

Technical parameter of 2D molding machine

Model	J2D-2-6	J2D-2-8	J2D-2-10	JS2D-2-6
Number axes	3	3	3	4
Processing line diameter(MM)	Hard wire ϕ 2-4	Hard wire ϕ 2-6	Hard wire ϕ 2-8	Hard wire ϕ 2-4
	Flexible wire ϕ 2-6	Flexible wire ϕ 2-8	Flexible wire ϕ 2-10	Flexible wire ϕ 2-6
Number of delivery wheels (Group)	3	3	3	3
Control system	32-bit high-performance processor, can store 2048 files, programming accuracy 0.01	32-bit high-performance processor, can store 2048 files, programming accuracy 0.01	32-bit high-performance processor, can store 2048 files, programming accuracy 0.01	32-bit high-performance processor, can store 2048 files, programming accuracy 0.01
Maximum wire speed(M/MIN)	80	70	60	90
Movement direction	rotating die can be raised and lowered, and the positive and negative motion can be realized	rotating die can be raised and lowered, and the positive and negative motion can be realized	rotating die can be raised and lowered, and the positive and negative motion can be realized	rotating die can be raised and lowered, and the positive and negative motion can be realized
Wire delivery accuracy(mm)	± 0.1	± 0.1	± 0.1	± 0.1
Solenoid valve and quantity	nothing	nothing	nothing	3
Input power	380V,50/60HZ	380V,50/60HZ	380V,50/60HZ	380V,50/60HZ



Dongguan Jinghongxiang Automation Equipment Co., Ltd.



13925780098



jhx16888@gmail.com



wire-bendingmachine.com

No. 78, Shangzhong Road, Shangdi Industrial Zone, Liaobu Town, Dongguan, Guangdong, China